

ANIL ZEMİN MARKET

THE FUTURE OF FLOORING

Tuuli Flooring®

PLAIN – METALLIC – RUMBA PLUS – SALSA – SOUND – AVANTI – ACOUSTIC



NORDIC



Hellsten
FLOORING



Tuuli Flooring®

Fit for many purposes

The excellent Tuuli Flooring® is a practical and very economical choice. It offers great sound and heat insulation, and is also a very durable, easy-to-maintain and fire-resistant alternative. Tuuli Flooring® is easy to install; you can cut it any way you like without fraying, and it's ready for use right away.

The soft Tuuli Flooring® is comfortable under your foot

Tuuli Flooring® can be used without problems both at home and different public spaces. Its woven surface is soft and comfortable to step on also with bare feet. Tuuli Flooring® is easy to keep clean, because its surface repels water and dust. Additionally, vinyl flooring dries quickly and does not grow moldy.



Nordic Tuuli Flooring®

Inspired by the colours and shapes of nordic nature and the arctic silence.

Our high quality vinyl floors are also available cut to shape. Nordic Tuuli Flooring® consists of classic geometric shapes. All Tuuli Flooring® designs and colours can be found in the entire Nordic Tuuli Flooring collection. We only use researched and tested materials.

Nordic Tuuli Flooring® gives you the opportunity to design spaces more boldly and create unique and personal spaces in hotels, banks, offices, shops, kitchens, balconies, bathrooms etc.

All our products are designed in Finland and made in Europe.

PLAIN



1102 Snowdrop



1290 Wheat



1332 Sunflower Seed



1270 Fudge



1340 Linen



1170 Biscotti



164 Reed Shark



118 Vanilla Nougat



127 Hazelnut



1357 Octopus



P19 Flaxseed



133 Liquorice Root



112 Black Olive



P30 Space

METALLIC



PM81 Drizzle



PM80 Windward



PM59 Dew Point



S1002 Morning Mist



PM82 Fog



PM61 Oceanic



S1006 Sleeping Moon




B1031 Golden Weather



PM56 Earlylight




PM64 Equinox

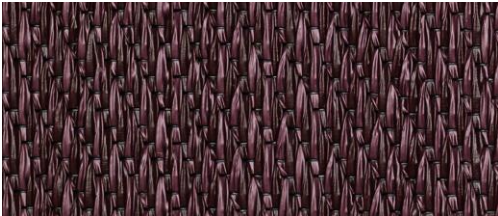

R1040 Scarlet Sky



BL1050 Night Sky



PM50 Black Light

RUMBA



RP90 Amazing




RP59 Trought Glass



RP56 Room With a View



RP50 The Groove



RP82 Attic



RP81 Artisan



RP54 Ego



RP55 Ghost Note

SALSA




SA310 Chai



SA308 Fennel




SA311 Pepper

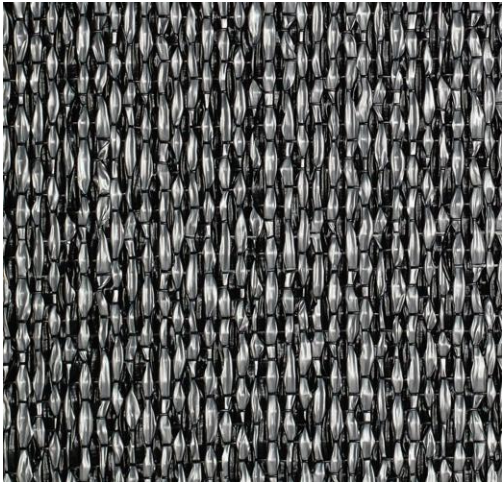

SA312 Sesame



SA314 Oyster




SA306 Cocoa


SOUND



SD3 Sympathy

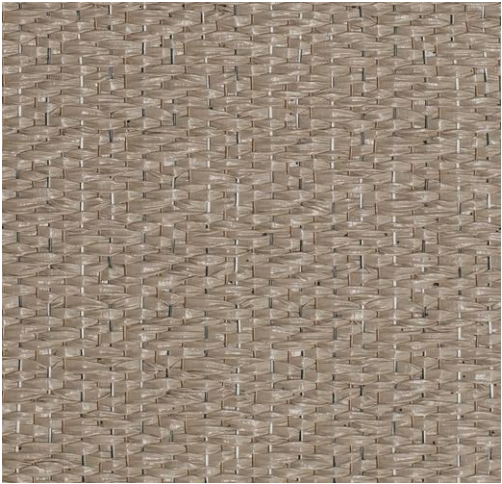

SD4 Satisfaction

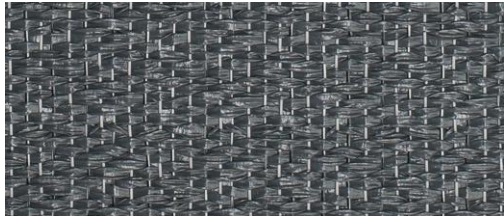

SD2 Imagination




SD1 Respectable




SD5 Emotional


Tuuli Flooring® Comfortable – Economical - Practical - Durable

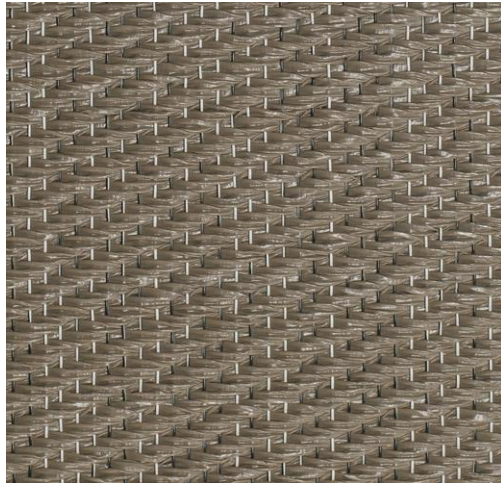

AV7 Clockwork



AV4 Kaleidoscope



AV5 Euphoria



AV1 Joining the Dots



AV2 Apparation




Acoustic

All the features you expect from Hellsten flooring – only quieter

Tuuli Flooring® is also available in an acoustic version. The Acoustic flooring softens the acoustics of a room and effectively muffles sounds such as footsteps. It comes in all the same colours, models and patterns as our other Tuuli Flooring® products – only the backing material is different.

Acoustic flooring is an excellent solution in spaces where the soundscape plays an important role for the functionality of a room. Corridors, restaurants and open offices are excellent examples of how low noise levels can have a significant impact on comfort. In fact, it's hard to think of a room that wouldn't benefit from a more pleasant and welcoming sound level. This means that our Acoustic flooring is truly versatile, whatever the purpose of the space.

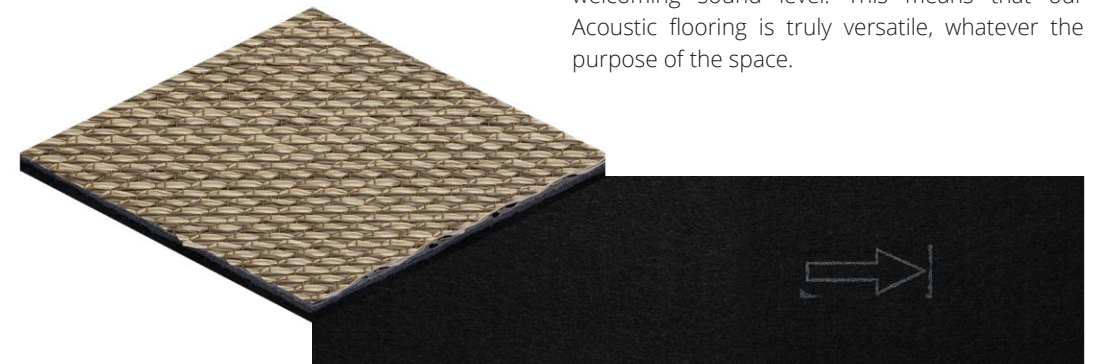

TECHNICAL SPECIFICATIONS

MATERIAL: 97% vinyl, 2% polyester, 1% fibreglass

Classification:	EN 1307	33
Weight rolls:	EN 8543	3000 g /m2
Weight tiles:	EN 8543	4000 g /m2
Roll width:	EN 426	200 cm
Total thickness:	EN 1765	3 mm
Dimension of tiles:	ISO 24342	50 cm x 50 cm
Fire rating:	EN 13501-1	Bfl S1
Smoke density:	ASTM E 662	<450
Critical radiant flux:	ASTM E 648	Class 1
Anti slip property:	DIN 51130	R10
Castor chair resistance:	EN 985	No effect
Airborne sound absorption:	EN ISO 354	0.05
Dimensional stability:	ISO 2551	Pass
Colour fastness to light:	ISO 105-B02	7
Impact sound insulation:	EN ISO 10140	15 dB / Acoustic 22 dB
Static electricity:	ISO 6356	Pass
Slip resistance:	EN 13893	Pass
Thermal resistance:	ISO 8302	Suitable for underfloor heating
CE certificate:	EN 14041	No. 0809-CPD-0816
Quality certificate:	ISO 9001:2015	No. EUFI29-19006031-C




Floor-laying:

Using a normal adhesive suitable for vinyl floors, the flooring is glued on a smooth and even under-floor. It's easy to have unnoticeable seams. The seams are only to be cold welded.

Maintenance:

Can be vacuumed or cleaned using suitable equipment. Solvents are not recommended. If required, the manufacturer will supply more detailed information on floor laying and maintenance.

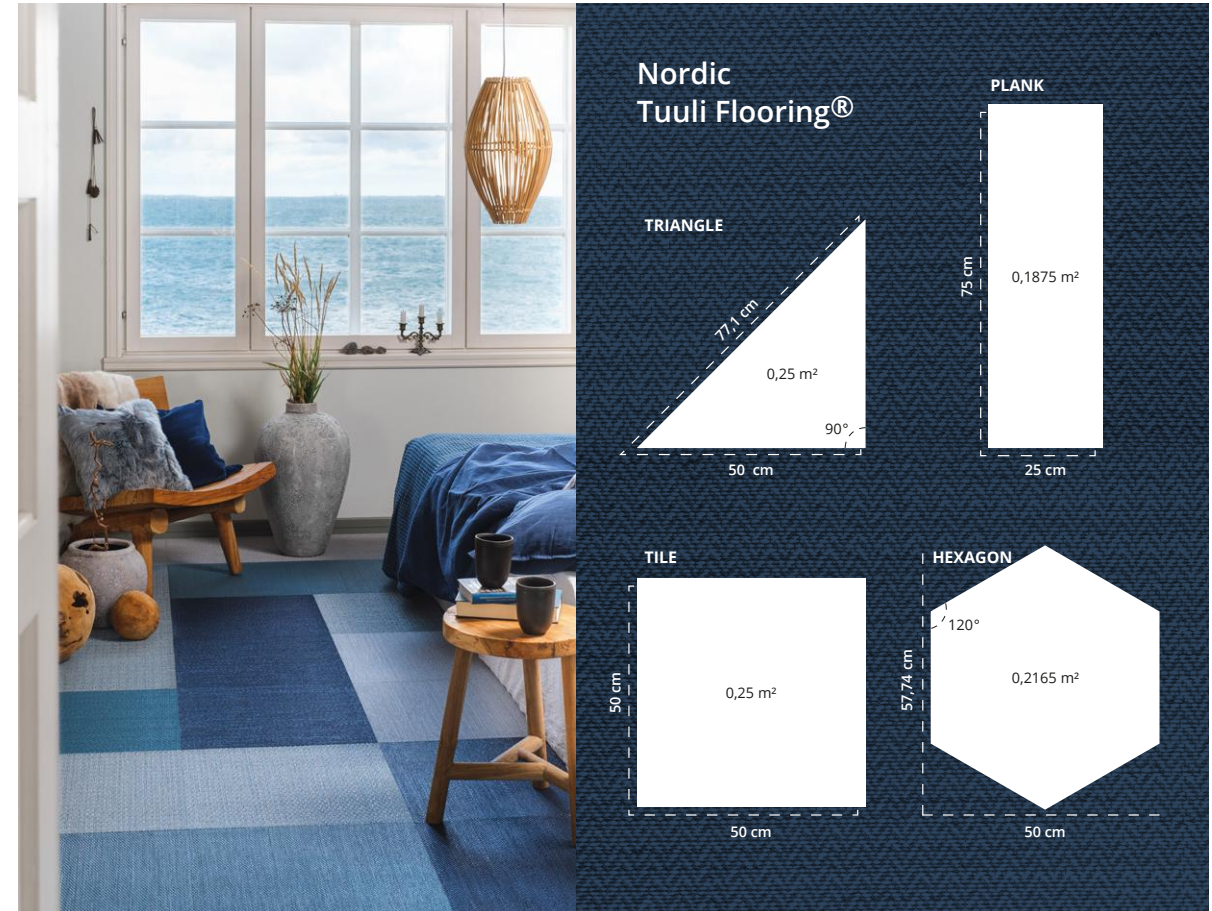

Inspired by the colours and shapes of nordic nature and the arctic silence.

Hellsten
FLOORING

