

TECHNICAL SPECIFICATIONS

MATERIAL: 97% vinyl, 2% polyester, 1% fibreglass

Classification:	EN 1307	33
Weight rolls:	EN 8543	3000 g /m2
Weight tiles:	EN 8543	4000 g /m2
Roll width:	EN 426	200 cm
Total thickness:	EN 1765	3 mm
Dimension of tiles:	ISO 24342	50 cm x 50 cm
Fire rating:	EN 13501-1	Bfl S1
Smoke density:	ASTM E 662	<450
Critical radiant flux:	ASTM E 648	Class 1
Anti slip property:	DIN 51130	R10
Castor chair resistance:	EN 985	No effect
Airborne sound absorption:	EN ISO 354	0.05
Dimensional stability:	ISO 2551	Pass
Colour fastness to light:	ISO 105-B02	7
Impact sound insulation:	EN ISO 10140	15 dB / Acoustic 22 dB
Static electricity:	ISO 6356	Pass
Slip resistance:	EN 13893	Pass
Thermal resistance:	ISO 8302	Suitable for underfloor heating
CE certificate:	EN 14041	No. 0809-CPD-0816
Quality certificate:	ISO 9001:2015	No. EUFI29-19006031-C




Floor-laying:

Using a normal adhesive suitable for vinyl floors, the flooring is glued on a smooth and even under-floor. It's easy to have unnoticeable seams. The seams are only to be cold welded.

Maintenance:

Can be vacuumed or cleaned using suitable equipment. Solvents are not recommended. If required, the manufacturer will supply more detailed information on floor laying and maintenance.

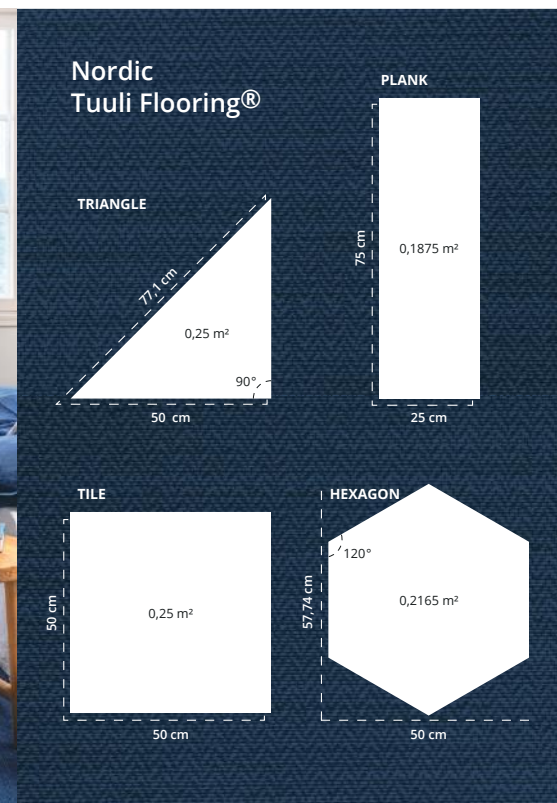

Inspired by the colours and shapes of nordic nature and the arctic silence.

Hellsten
FLOORING